

LED LIGHT SYSTEM [L2S09]

SPECIFICATION

- Lamp Type
 - High power LED (White color)
- Weight
 - Control Unit : 40g, Battery pack: 126g,
 - LED Lens Module (has 2 optional type)

Model	LLM0982	LLM0966
Weight	35.1g	34.2g

Where, LLM0982 is standard model.


- Brightness & Operating time

Step	Brightness (lux) @WD400mm		Operating time (hr)
	LLM0982	LLM0966	
1 st step	9,000	14,000	18
2 nd step	16,000	26,000	9
3 rd step	20,000	32,000	7
4 th step	24,000	38,000	5


- Diameter of Illumination @ WD400mm

Model	LLM0982	LLM0966
Dia.	Ø82 mm	Ø66 mm

- Electric charging time : 5 hrs (full charge)

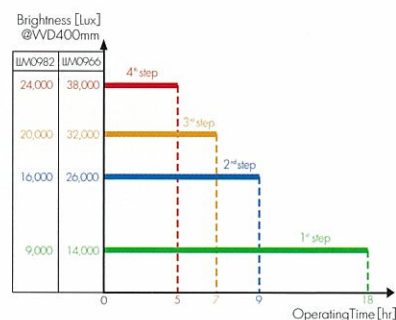

- Illumination is similar to sunlight
 - Co-axial lighting system (No shadow)
 - Easy to recharge
 - Easy to exchange battery pack
 - Larger and Uniform
 - Long operating time
1. L2S is brightest among the existing LED Headlight system.
 2. L2S has the power consumption of 2 watt comparing to other products with 3 watt.
 3. The illumination area is large and the brightness distribution is uniform.

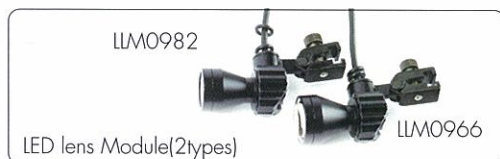

ATTACHMENT TYPE



Attachment to TTL



Attachment to headband



Attachment to common glasses

OPTIONAL ACCESSORIES



Soft headband (CHB01)



Hard headband (RH-B02)



Universal adapterclip (UGC01)

発売元



(株) メディカル プロGRESS

〒812-0011 福岡市博多区博多駅前4-24-23(第7森谷ビル5階)
Tel : 092-414-7273 Fax : 092-414-7270
http://www.mp-ltd.jp E-mail: info@mp-ltd.jp

お問い合わせ先